


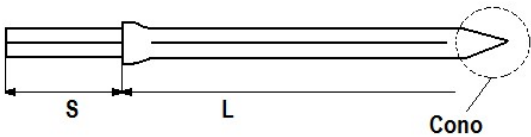

Barrena Cónica (Tapered Rod)	Longitud (L)		Peso aprox. kg
	mm	pies	
<p>S = Culata Hexagonal (Shank) 108mm x 22mm</p>  <div style="border: 1px solid blue; background-color: #90EE90; padding: 5px; margin: 10px 0; width: fit-content;">Permanent Stock</div>	Cono 4° 46'		
	800	2' 7 1/2"	2,9
	1600	5' 3"	5,4
	2000	6' 6 3/4"	6,6
	2200	7' 8 3/8"	7,1
	2400	7' 10"	7,8
	3200	10' 6"	10,2
	3500	11' 5 3/4"	11,1
	4000	13' 1 3/8"	12,7
	Cono 7°		
	400	1' 3 3/4"	1,7
	800	2' 7 1/2"	2,9
	1830	6'	6,0
	2000	6' 6 3/4"	6,5
	2435	8'	7,8
	3050	10'	9,9
	3200	10' 6"	10,1
	4000	13' 1 3/8"	12,7
	Cono 11°		
	610	2'	2,4
	1220	4'	4,2
	1525	5'	5,0
	1830	6'	6,1
	2000	6' 6 3/4"	6,6
	2435	8'	7,9
	2600	8' 6 5/16"	8,4
	3200	10' 6"	10,3
	3655	12'	11,7
	4000	13' 1 3/8"	12,8
	4800	15' 8 7/8"	15,1
	5600	18' 4 5/16"	17,5
	6400	21'	20,0
	7200	23' 7 1/4"	22,4
	8000	26' 2 3/4"	24,9
	Cono 12°		
	610	2'	2,3
	1220	4'	4,2
	1525	5'	5,1
	1830	6'	6,1
	2000	6' 6 3/4"	6,6
2435	8'	7,9	
3050	10'	9,8	
3200	10' 6"	10,2	
3655	12'	11,7	
3965	13'	12,8	
4800	15' 8 7/8"	15,2	
5600	18' 4 5/16"	18,4	
6400	21'	20,0	
7200	23' 7 1/4"	22,0	
8000	26' 2 3/4"	24,8	