



Barrena Integral de Bisel (Integral Drill Rod)

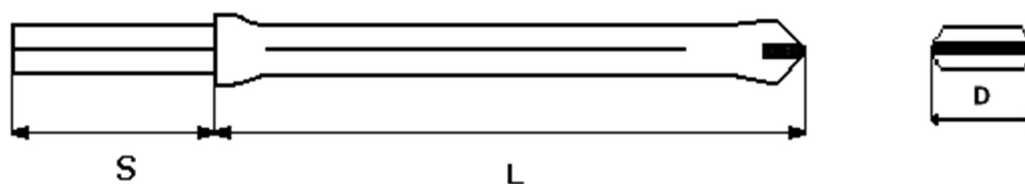

Barra Hex. = 19 mm				
Culata Hex. (S) = 108 mm x 19 mm				
Longitud (L)		Diámetro (D)		Peso
mm	pies/pulg	mm	pulg	Kg
400	1' 3 ³ / ₄ "	29	1 ¹ / ₃₂	1.3
500	1' 7 ⁷ / ₈ "	29	1 ¹ / ₃₂	2.0
800	2' 7 ¹ / ₂ "	28	1 ¹ / ₈	2.2
1 000	3' 3 ³ / ₈ "	28	1 ¹ / ₈	2.6
1 200	3' 11 ¹ / ₄ "	27	1 ¹ / ₁₆	3.0
1 600	5' 3"	27	1 ¹ / ₁₆	4.0
3 200	10' 6"	25	1	7.5
4 000	13' 1 ¹ / ₂ "	24	1 ¹⁵ / ₁₆	9.2
400	1' 3 ³ / ₄ "	24	1 ¹⁵ / ₁₆	1.3
800	2' 7 ¹ / ₂ "	23	2 ⁹ / ₃₂	2.2
600	1' 11 ⁵ / ₈ "	27	1 ¹ / ₁₆	1.7
1 200	3' 11 ¹ / ₄ "	26	1 ¹ / ₃₂	3.1
2 400	7' 10 ¹ / ₂ "	24	1 ¹⁵ / ₁₆	5.7
400	1' 3 ³ / ₄ "	35	1 ¹ / ₈	1.4
800	2' 7 ¹ / ₂ "	34	1 ¹ / ₃₂	2.3
400	1' 3 ³ / ₄ "	24	1 ¹⁵ / ₁₆	1.4
400	1' 3 ³ / ₄ "	29	1 ¹ / ₃₂	1.4
600	1' 11 ⁵ / ₈ "	27	1 ¹ / ₁₆	1.8
800	2' 7 ¹ / ₂ "	23	2 ⁹ / ₃₂	2.3
800	2' 7 ¹ / ₂ "	28	1 ¹ / ₈	2.3
1 200	3' 11 ¹ / ₄ "	23	2 ⁹ / ₃₂	3.0
1 600	5' 3"	27	1 ¹ / ₁₆	4.0
2 400	7' 10 ¹ / ₂ "	26	1 ¹ / ₃₂	5.8

Barra Hex. = 22 mm				
Culata Hex. = 108 mm x 22 mm				
Longitud (L)		Diámetro (D)		Peso
mm	pies/pulg	mm	pulg.	Kg
400	1' 3¼"	34	1½	1.7
800	2' 7½"	34	1½	3.0
1 600	5' 3"	33	1⅞	5.4
2000	6' 6¾"	32	1¼	6.6
2000	6' 6¾"	33	1⅞	6.6
2 400	7' 10½"	32	1¼	7.9
3 200	10' 6"	31	1½	10.3
4 000	13' 1½"	30	1⅞	12.6
4 800	15' 9"	29	1½	15.1
5 600	18' 4½"	28	1⅞	17.6
6 400	21'	27	1⅞	19.9
7 200	23' 7½"	26	1½	22.3
800	2' 7½"	40	1⅞	3.0
1 600	5' 3"	39	1½	5.4
2 400	7' 10½"	38	1½	7.8
3 200	10' 6"	37	1½	10.3
4 000	13' 1½"	36	1½	12.6
4 800	15' 9"	35	1⅞	15.1
5 600	18' 4½"	34	1½	17.6
6 400	21'	33	1⅞	19.8
7 200	23' 7½"	32	1¼	22.2
8 000	26' 3"	31	1½	24.6
8800	28 ⅞	30	1⅞	28.4
9600	31' 6"	29	1½	30.4

Barrena Integral Torneada (Plug Hole Rod)

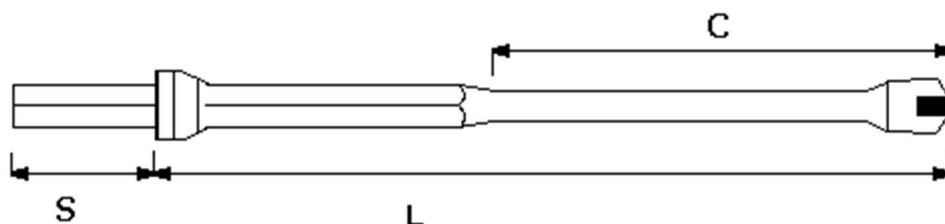

Varias medidas disponibles, tanto en culata de 19 mm como 22 mm.